

EONCOAT®

Technical Data Sheet

v.5.- Last Updated Jun-2023

Product Code:

EonCoat Weldable Tank Bottom Coating - Part A
EonCoat Weldable Tank Bottom Coating - Part B

General Description: Two component, inorganic, coating. Forms a continuous coat of ceramic coating that provides excellent anti-corrosion properties for carbon steel.

Product Features:

- Superior anti-corrosive tank bottom coating for protection of steel
- Fast drying and rapid return to service
- Inorganic water based, no VOC, no HAPs, no odor and zero flame spread

Technical Data:

<u>Color:</u> White	<u>Sheen:</u> Flat	<u>Mixing Ratio:</u> 1:1 must require plural pump to spray.	<u>Clean up:</u> Water
<u>Volume Solid:</u> 95±5%	<u>Thinner:</u> Do Not Thin	<u>Theoretical Coverage:</u> ~40 ft ² /gallon @ 40 mils	
<u>Shelf life:</u> 1 year.	<u>Pot life:</u> N/A - None	<u>Flash Point:</u> N/A	

Storage: Do not store EonCoat-WTBC in direct sunlight for a prolonged period of time. Minimum storage temperature is 45°F (8°C) and maximum 110°F (44°C). When opened, containers can be used more than once when lids are tightly sealed after each use. Opened containers should be used within (1) month after opening.

Drying Schedule @ 40 mils Wet

	@ 50°F	@ 75-80°F	@ 100°F
To touch:	~15 min	~8 min	~5 min
To handle:	1 hour	~45 min	~30 min
To recoat:			
Minimum:	10-15 min	8-10 min	5-8 min
Maximum:	No recoat window. Coating may need to be clean with water before recoating.		

Drying time is temperature, humidity, and thickness dependent.

Surface Preparation

Surface must be clean, damp to dry, and in sound condition. Remove all oil, dust, grease, dirt, loose rust, and other foreign material to ensure adequate adhesion and reaction with steel.

→Refer to product application brochure (pictures and surface requirements) for detailed surface preparation information.

Minimum recommended surface preparation:

For Iron and Steel:

Atmospheric:	SSPC – SP 6/ NACE 3 / SSPC-SP WJ-1 L/NACE WJ-1/L (with existing profile). Minimum profile required: 3 mils. Flash rust with damp surface is accepted. Mill scale is not accepted.
Tank Bottom Coating:	SSPC – SP 6/ NACE 3 / SSPC-SP WJ-1 L/NACE WJ-1/L (with existing profile). Minimum profile required: 3 mils. Flash rust with damp surface is accepted. Mill scale is not accepted.

Recommended Uses

For use over properly prepared steel in the following industrial tank bottom environments:

- * Petro-Chemical -- Tank Bottoms Soil Facing Side
- * Petroleum Refineries – Tank Bottoms Soil Facing Side
- * Storage tanks – Tank Bottoms Soil Facing Side
- * Pulp and Paper Mills – Tank Bottoms Soil Facing Side
- * Marine – Tank Bottoms Soil Facing Side

Application Conditions

Temperature: Surface: 50°F minimum 120°F maximum
Material: 60°F minimum 95°F maximum
* Misting with water may be required depending on surface temperature and wind conditions. Refer to product application brochure for more information. Also refer to triangle graph enclosed here.

Dew Point: No restriction

Relative Humidity: 20-98%

Refer to the triangle graph on page 3 for more detail about application conditions.

Ordering information

Packaging:	9 gallons
Part A - Weldable Tank Bottom Coating (WTBC):	4.5 gallons in 5 gallons container
Part B Weldable Tank Bottom Coating (WTBC):	4.5 gallons in 5 gallons container



Technical Data Sheet

v.5.- Last Updated Jun-2023

Weight: 14.8-15 lbs./gallon → 68-70 lbs. bucket weight

For Concrete & Masonry

Atmospheric: SSPC-SP13/ NACE 6
 Immersion: SSPC-SP13/ NACE 6

Surface Preparation Standards

Condition of Surface	ISO 8501-1 BS7079:A1	SSPC	NACE
White metal	Sa 3	SP 5	1
Near White metal	Sa 2.5	SP 10	2
Commercial Blast	Sa 2	SP 6	3
Brush-Off Blast	Sa 1	SP 7	4
Hand Tool Cleaning	Rusted/Pitted	C St 2/ D St 2	SP 2 / SP 2
Power Tool Cleaning	Rusted/Pitted	C St 3/ D St 3	SP 3/ SP 3

Application Equipment

The following is a guide. Changes in pressures and tip sizes may be needed for proper spray characteristics. Always purge spray equipment before use with water. No reduction is necessary. DO NOT REDUCE. Clean up with water.

Clean up:	Water
<u>Airless Spray:</u>	
Pump	30:1
Pressure	700 - 3200 psi
Hose	½ - ¾" diameter
Tip	225 - 543
Filter	30 mesh
Reduction	Do Not Reduce. Not Recommended.

Refer to product application brochure for complete detail on pump set up and instructions.

Application Procedures

Surface preparation must be completed as indicated

Mixing Instructions.

Part A (WTBC): Part A (Acidic component of acid-base reaction) comes in a gel form. Four blade paddle mixture needs to be used to break gel apart. Once gel has been broken material gains some fluidity, bucket needs to be mixed with bucket (dispersion blade) mixture. Make sure no material remains on the bottom of the bucket. ~3-5 min mixing is needed to ensure proper mixing and no agglomerations.

Part B (WTBC): Part B (Basic component of acid-base reaction) needs to be mixed with four blade paddle mixture or conventional mixing blade. Make sure no material remains on the bottom of the bucket. ~1-3 min mixing is needed to ensure proper mixing of product with no agglomerations.

Recommended Spraying Rate

	Minimum	Maximum	
Wet Mils	45	45-60	Coverage: 40 ft ² /gallon
Dry mils	40	40-60	

Refer to product application brochure for complete application procedures and instructions to overcome issues.

To prevent sagging follow drying schedule.

Misting with water may be required depending on surface temperature and wind conditions. EonCoat chemically reacts with flash rust and it can be applied over rust. For further detail refer to product application brochure.

Safety Precautions

Refer to the SDS sheet before use.

Published technical data and instructions are subject to change without notice. Contact your EonCoat representative for additional technical data and instructions.

Performance Characteristics

Substrate:	Steel (Unless otherwise noted with test results)	
Surface Preparation:	SSPC - SP 6/ NACE 3 / SSPC-SP WJ-1 L/NACE WJ-1/L	
System Tested:	EonCoat (as a primer) 17-25 mils. with acrylics/ polysiloxane/ urethane topcoats 4-8 mils.	
Test Name	Test Method	Results
Abrasion Resistance (Primer only)	ASTM D 4060, CS 17 wheel, 1000 cycles, 1 Kg load	1000 Wear Cycle per Mil (WCM); 180 mg mass loss
Adhesion*	ASTM D 4541	550 psi
Corrosion Resistance*	ASTM D 5894, 12 cycles, 4000 hours	Rating 10 per ASTM D 610 for Rusting Rating 10 per ASTM D 714 for Blistering
Direct Impact Resistance (Primer Only)	ASTM D 2794	80 in. lbs.
Flexibility (Primer Only)*	ASTM D 522	18% Elongation
Immersion Resistance, Salt Water	77°F, 2000 hours	Rating 10 per ASTM D 610 for Rusting Rating 10 per ASTM D 714 for Blistering
Immersion Resistance, Fresh Water	77°F, 2000 hours	Rating 10 per ASTM D 610 for Rusting Rating 10 per ASTM D 714 for Blistering
Moisture Condensation Resistance	ASTM D 4585, 100°F, 2000 hours	Rating 10 per ASTM D 610 for Rusting Rating 10 per ASTM D 714 for Blistering
Pencil Hardness (Primer Only)	ASTM D 3363	8H
Salt Fog Resistance*	ASTM B 117, 4000 hours	Rating 10 per ASTM D 610 for Rusting Rating 10 per ASTM D 714 for Blistering
Flame Spread and Smoke Generation (Primer Only)*	UL 723	Zero Flame Spread and Zero Smoke Generation
Thermal Conductivity (Primer Only)		0.25 W/Mk @ 25°C
Water Vapor Transmission (Primer Only)	ASTM E 96	2.5 perm-inch
Resistance to Growth of Mold*	ASTM D3273	Rating - 10 = Passed
Fire Resistance*	EN 13823	B-s1, d0 Classified as B or Better
*Tested by third party lab. Reports available on request.		

Clean Up Instructions


Clean up spray gun and pump with water following instructions written in application brochure. DO NOT USE SOLVENTS.

Warranty

The EonCoat limited product warranty can be found on the company website at www.eoncoat.com

Disclaimer

The information and recommendations set forth in this technical data sheet are based upon tests conducted by or on behalf of the EonCoat, LLC. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication. Consult your EonCoat representative to obtain the most recent technical data sheet information and application brochure.

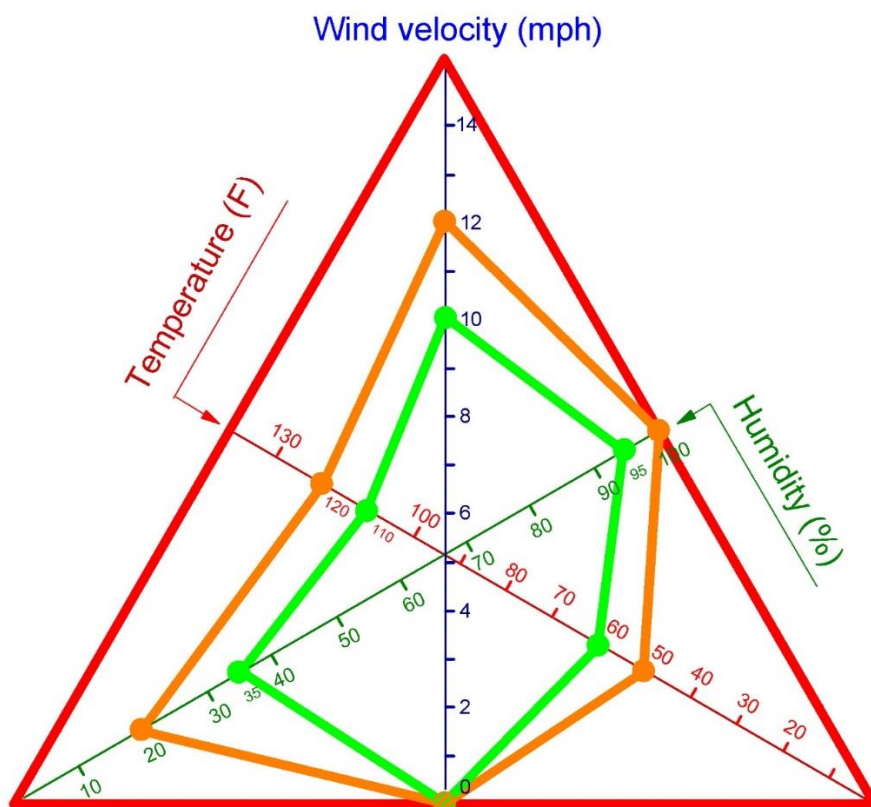

Using the chart above:

Apply EonCoat if conditions (wind velocity, substrate temperature and humidity) fall inside the green line of the parameters. Misting may be required if hairline cracking occurs. Test small area in extreme conditions to determine path forward.

Contact EonCoat for advice on how to proceed if conditions fall between the green line and orange line.

Do not apply EonCoat if conditions fall outside of the orange line (between orange and red line, or above the red line). Speak with an EonCoat representative if conditions fall outside of the orange line.